


P-20s | The stove

stuv

FEATURES

delight of the fire	enlarged view
	continuous line of the combustion chamber
	maximum experience from different areas of the living room
pleasant heating	over 90% efficiency
	natural convection to distribute heat more broadly
	amplified radiation thanks to the large glazed area
	flame quality comparable to those of a wood fire, thanks to its patented "flower burner"
silent	natural convection - no noise from the blower
	wood pellets are lifted, no annoying clattering
	continuous geared motor on intake screws
ease of use	quick access to different functions and operating modes via the integrated simplified control display
	full remote control via mobile app
	optional remote control with integrated thermostat
	automatic ash removal for minimal maintenance
	large-capacity ash drawer
	sensor to indicate amount of pellets
ergonomics	front loading via a wide, ergonomic hopper
	18 kg pellet tank with no risk of overflow
ease of installation & maintenance	four types of connection to outside air
	possibility of flue connection from the top of the appliance (single or concentric outlet)
	easy access through opening panels
	hinged access to fan
	chimney sweep at ground level
high quality	ceramic igniter
	two-point locking system
	thick casing
	extremely well sealed
environmental performance	CO and fine particle emissions approaching zero
	exceeds the expectations of the ecodesign 2022 standard
patent	loading system
	burner

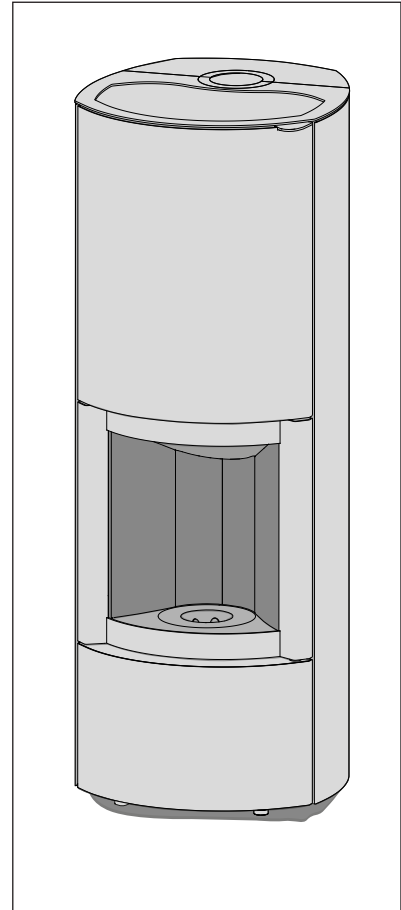

P-20s | The stove

stuv**TECHNICAL OVERVIEW****GENERAL**

TYPE OF STOVE	stove
FUEL	wood pellets
MATERIALS OF BODY OF FIRE CHAMBER	steel + vermiculite
MATERIALS COVERING BASE	steel
COLOUR	StûvBlack
LOADING	manual

WEIGHT / DIMENSIONS

WEIGHT	180 kg
DIAMETER OF SMOKE FLUE	80 mm 80/130 mm
DIAMETER OF OUTSIDE AIR INLET	60 mm

AIR

EXTERNAL INLET	✓
AIR-TIGHTNESS	+++

NOMINAL PERFORMANCE

NOMINAL POWER	8,1 kW
RANGE OF USAGE	3,7 - 8,1 kW*
HOPPER CAPACITY	18 kg
RANGE OF CONSUMPTION	1,84 kg/h
INDEPENDENT OPERATING DURATION (MIN/MAX)	10 - 21 h
EFFICIENCY	90,3 %
SEASONAL EFFICIENCY	87 %
CO EMISSIONS	0,0003 %
FINE PARTICLE EMISSIONS	6 mg/Nm ³
MINIMUM DRAW	6 Pa
SMOKE MASS FLOW	4,9 g/s
AVERAGE TEMP. OF SMOKE	222 °C
ELECTRICAL CONNECTION	230 - 50 V/Hz
ELECTRICAL CONSUMPTION	24 W
ENERGY EFFICIENCY INDEX (EEI)	128
ENERGY EFFICIENCY CLASS	A+
DECIBELS	

**MINIMUM SAFETY DISTANCE FOR
COMBUSTIBLE MATERIALS**

BACK FACE	10 cm
SIDE FACE	10 cm
TOP FACE	80 cm
BOTTOM FACE	0 cm

ACCESSORIES / EQUIPMENT

REMOTE CONTROL	○
MANUAL ASH REMOVAL RACK	✓
ASH PAN	✓
WIFI HANDSET	○

LEGEND


✓	STANDARD
✗	UNAVAILABLE
○	OPTIONAL

* Minimum power (3,7 kW) ou nominal power (8,1 kW) depending on installation restrictions

P-20s | The stove



THE BASIC STOVE AND ITS COMPONENTS

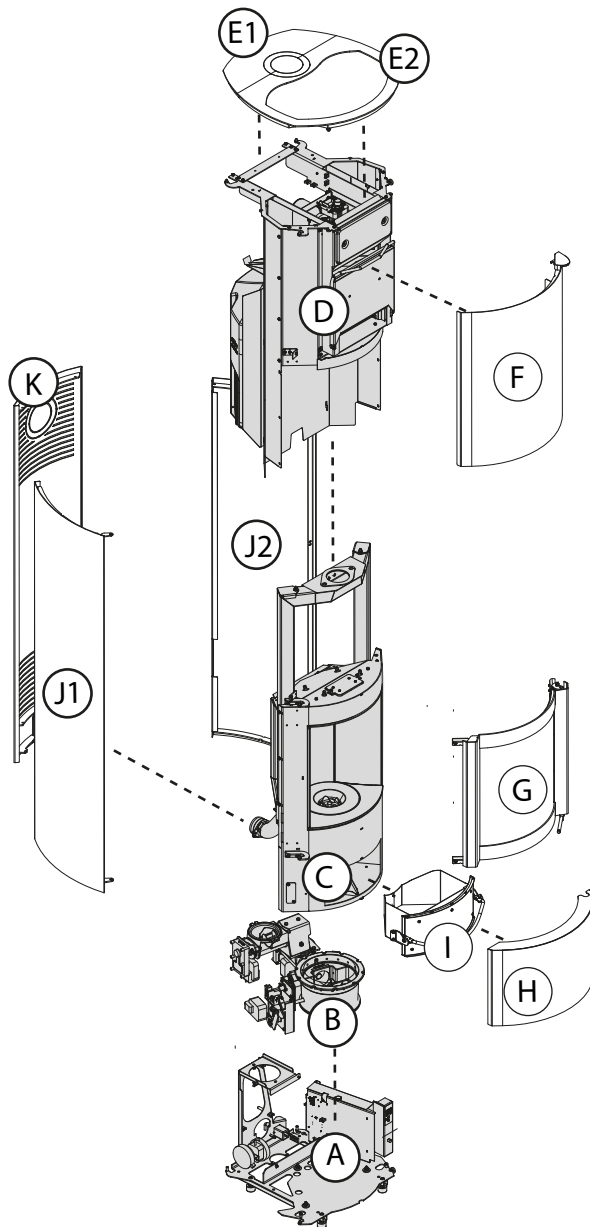


- A. Burner base with air intake system
- B. Pellet feed screw and fire bed
- C. Combustion chamber, heat exchanger and safety valve
- D. Smoke extractor and pellet tank
- E.1. Rear top shelf
- E.2. Front top shelf
- F. Loading hopper access door
- G. Combustion chamber door
- H. Ash drawer door
- I. Ash drawer
- J.1. Left facing
- J.2. Right facing
- K. Bottom door

P-20s | The stove


stuv

DIMENSIONS OF THE STOVE


TOP VIEW

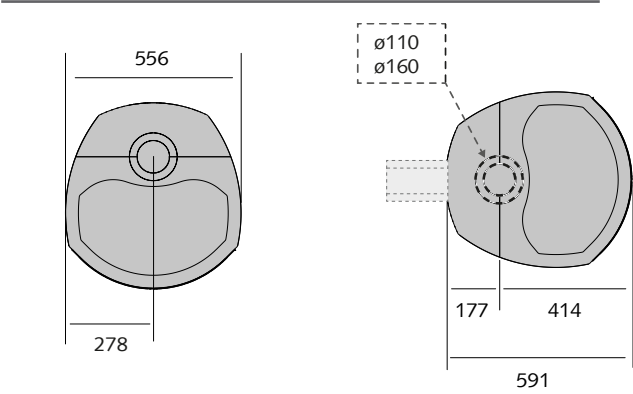


SIDE VIEW

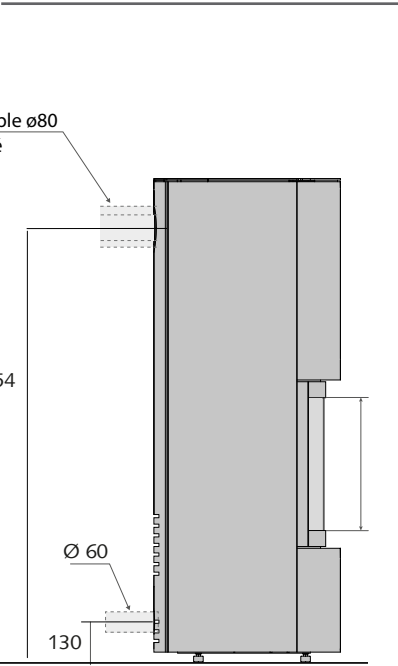


FRONT VIEW

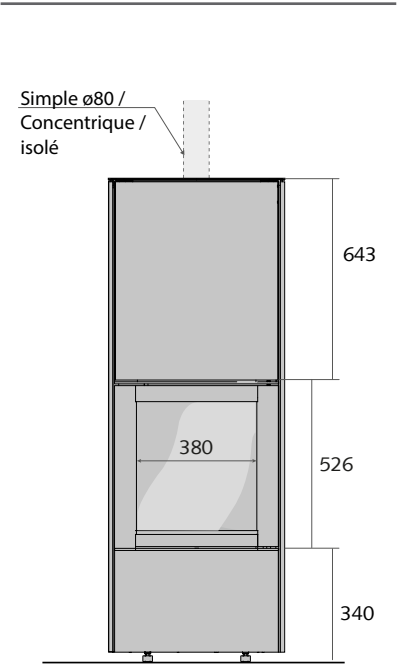

REAR VIEW

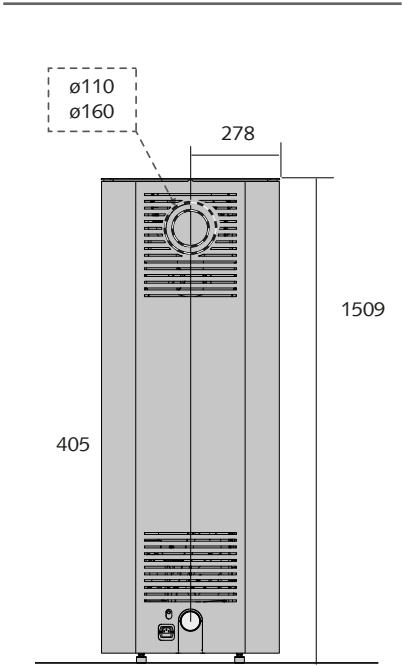



BOTTOM VIEW

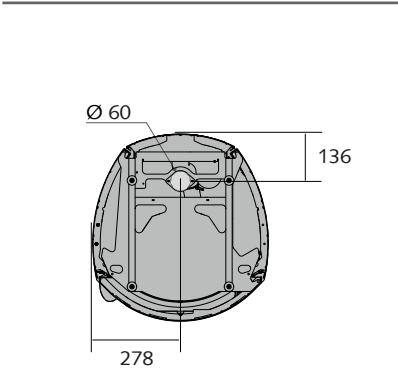

P-20s | The stove

stûv


MODE OF OPERATION

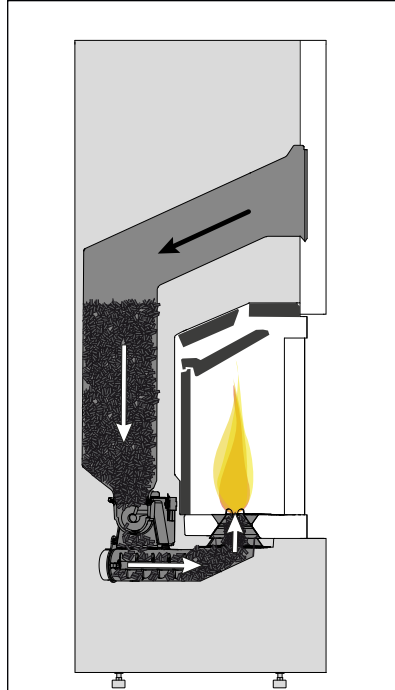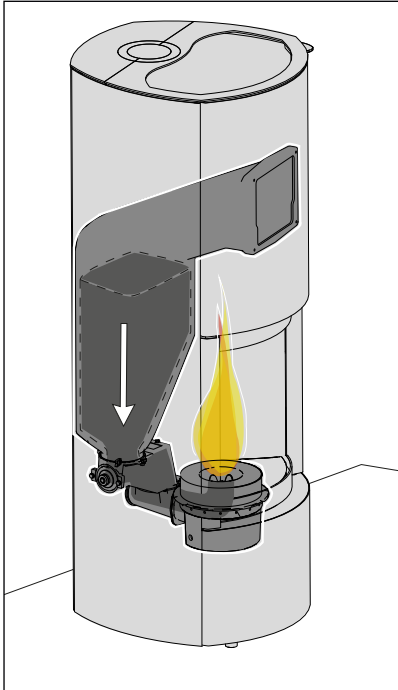

The Stûv P-20s is equipped with a pellet tank, a fuel supply system, a combustion air supply system, a smoke extraction system, as well as electronics and sensors to modulate and regulate the operation of the appliance.

The combustion chamber radiates and diffuses heat by convection, and is fitted with a glass pane offering a view of a large, beautiful flame. The appliance is equipped with an electronic control system that adjusts two variables to provide optimum thermal comfort. Depending on the user's requirements, the Stûv P-20s will adjust its output and maintain it by adjusting :


- the quantity of pellets burnt [diagram 1&2]
- the amount of air supplied to combustion [diagram 3].

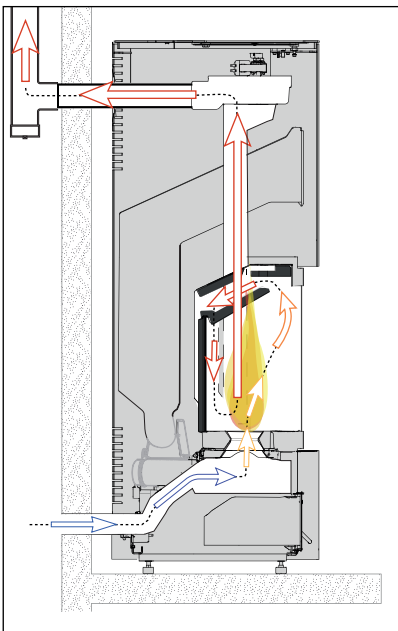

P-20s | The stove


stuv

COMBUSTION AND CONVECTION

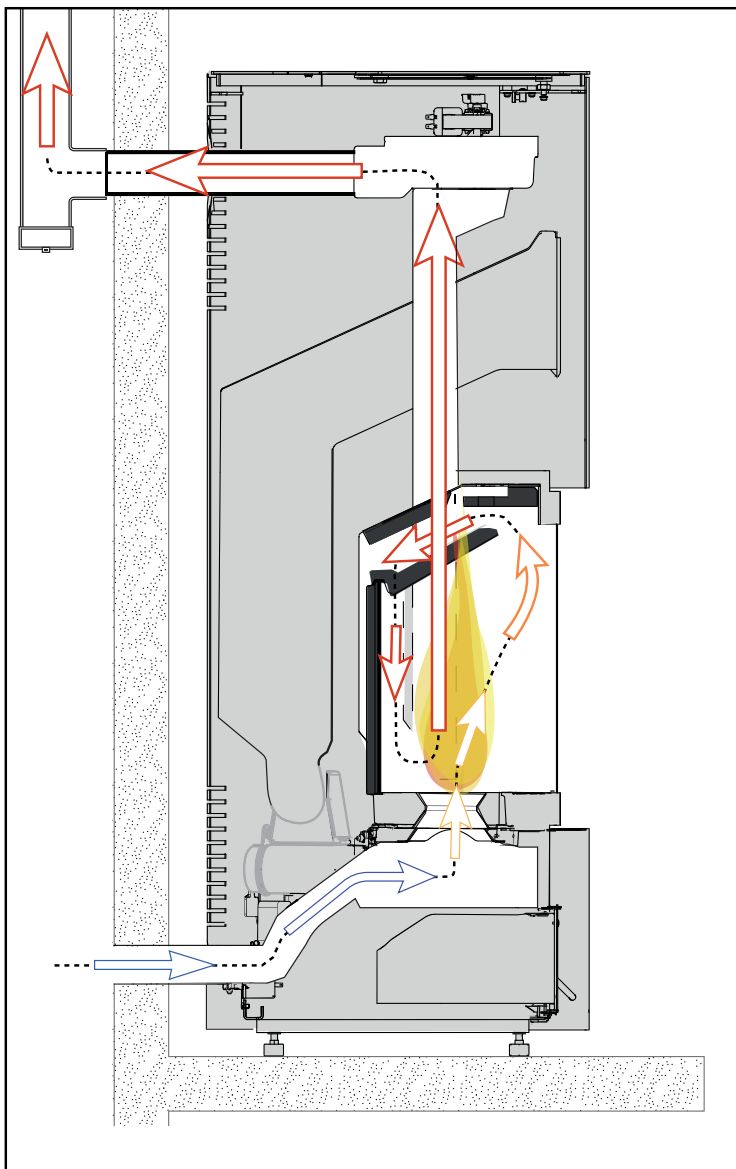

1. The air needed for combustion is taken from outside the building (under the stove or at the back of the device) or from inside the building."
2. The air intake, the combustion chamber and form an airtight system which does not hinder the insulation and ventilation of the building.
3. The smoke passes through a heat exchanger, is sucked through a fan and then vented through the flue.
4. The air of the living room is drawn to be reheated.
5. Air circulates in the convection chamber and harnesses the heat from the fumes.
6. The reheated air comes out of the device naturally, then noiselessly spreads around the room.
7. The heat radiates through the glass

SUPPLYING THE PELLETS

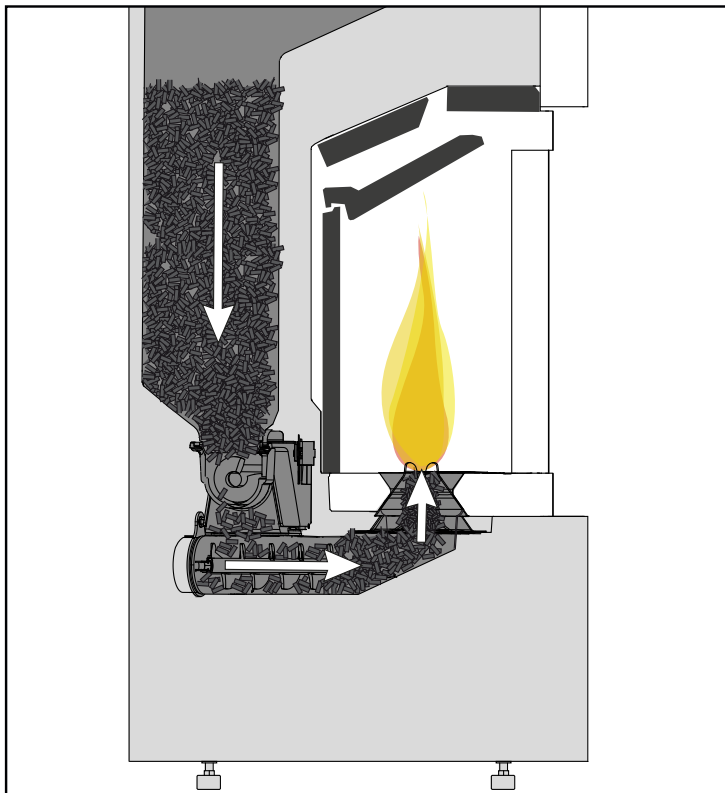

The pellets are stored in the hopper which is located beneath the combustion chamber.

They are transported via an Archimedean screw, which places them in the burn pot, avoiding undesirable clattering sounds.

P-20s | Accessories

stuv

REMOTE CONTROL



WIFI HANDSET



PELLET TWIN SET

